
STEP

Fabric with a Lock-Stitch Optical Effect





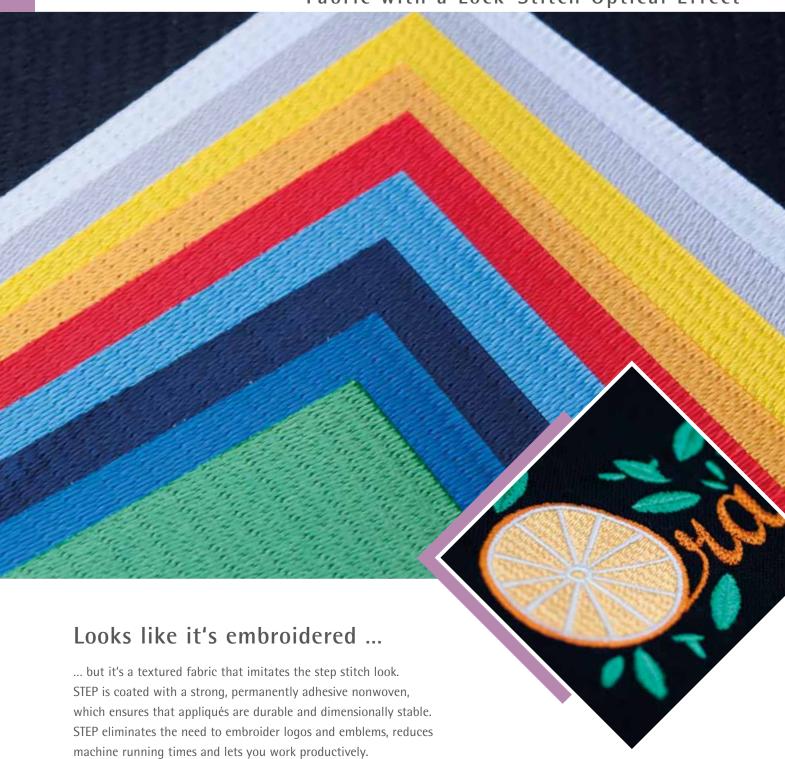

Processing Recommendations:



STEP can fray when cutting with scissors or a cutting plotter. Therefore it is recommended to laser the appliqués before embroidering, this will fuse the edges.


There are two ways of working with appliqués:

- Direct embroidery on the textile
- Patches that can be sewn or ironed onto the textile at a later time.

For more information watch a video at: www.gunold.de/en/video-training/embroideringof-patches/

Care Instructions:











OUR SERVICE:

laser cut appliqués. a quote.

Technical Information:

Material composition:

STEP: 100% Polyester 100% Polyethylene Adhesive:

Weight (incl. nonwoven coating):

STEP: 325 g/m²

Colour range:

Available in 10 standard colours (see STEP shade card)



Especially for patterning:

39 x 29 cm samples of all colours are packaged in a handy box.

- Make-up: Rolls of 75 cm x 3 m, 75 cm x 10 m
- Minimum Order:

1 Roll



Make your own comparisons!

The left photo shows an embroidery on STEP with 4.800 stitches, the right one shows the same embroidery completely filled with 18.000 stitches.

With STEP you're saving 13.200 stitches, a lot of embroidery time and thread.

Professional materials for high-quality embroidery results - tried and tested in the clothing, promotion and home textile industries. For more information visit our website www.qunold.de!

Distributed by:

