

HEAT STIC


Double-Sided Adhesive



Appliqué Made Easy!

With HEAT STIC attaching appliqué pieces to your fabric is a breeze - cut to any size with scissors, laser cutter or cutting plotter. With a heat press attach HEAT STIC onto the wrong side of your appliqué fabric and cut out your pattern. Then peel off the release sheet, stick the design in place and embroider. Since HEAT STIC is a very versatile product it can be used for numerous applications: e.g. keyring pendants, placemats, collage etc.

GUNOLD[®]




HEAT STIC



Processing Recommendations:

- ◆ Place fusible side of HEAT STIC onto wrong side of fabric and iron with heat press. (fig. 1+2)
Settings:
 - temperature about 100°C - 120°C
 - pressure about 4 bar
 - time about 5 seconds
- ◆ Cut out design using a laser cutter, scissors or cutting plotter (fig. 3).
- ◆ Peel off release paper- back of fabric is now self-adhesive (fig. 4).
- ◆ Place design onto embroidered contour then finish embroidery process.
- ◆ Embellish design to your liking.

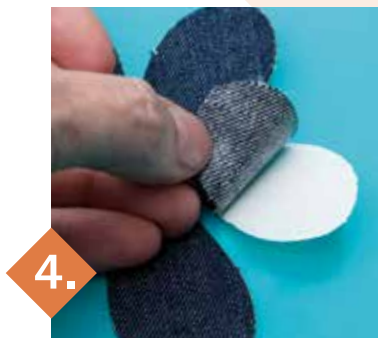

Technical Information:



- ◆ **double-sided adhesive film**
- ◆ **Material:**
 - Base: 100% Polyester
 - Coating: 100% Polyacrylate
 - Cover: Silicone Paper
- ◆ **Colour:** transparent
- ◆ **Weight:**
 - Base: 30 g/m²
 - Coating: 7 g/m²
 - Cover: 125 g/m²
- ◆ **Make-up:**
 - rolls in different sizes
 - roll 50 cm x 300 m
 - roll 50 cm x 25 m
- ◆ **Minimum Order:**
 - 1 roll

Professional materials for high-quality embroidery results – tried and tested in the clothing, promotion and home textile industries. For more information visit our website www.gunold.de!

Distributed by:

GUNOLD[®]

